




Slot channel SRD

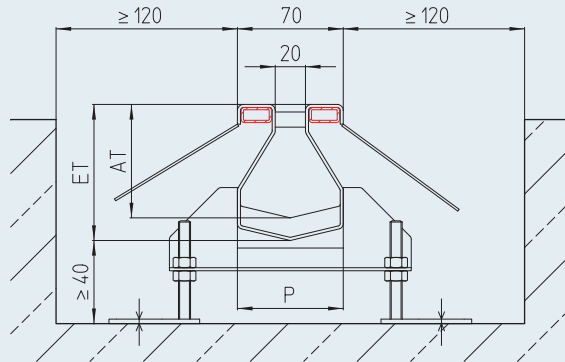

ET = ED
AT = ID


Channel model	P [mm]	ID ²⁾ [mm]	Fall	AD [mm]
SRD-70	70	75	0.6 %	
SRD-90	90	110	0.6 %	

Calculation ED: ID + L1 x 0,006 [ID; ED; L1 in mm]


Grade

■ 1.4301 (AISI 304) ■ 1.4571 (AISI 316 Ti)¹⁾ / 1.4404 (AISI 316)

Floor connection (optional)





HFLALO Bonding flange, perforated¹⁾





HF Bonding flange¹⁾

Channel drain ⁶⁾ – vertical – single-part						Channel drain ⁶⁾ – horizontal – single-part						
Model	DN	Ø d [mm]	∅ B [mm]	Ø D [mm]	H ⁹⁾ [mm]	Model	DN	Ø d [mm]	∅ B [mm]	Ø D [mm]	H ⁹⁾ [mm]	HRS ⁹⁾
RBE DRS-070-E-S	70	75	180	153	280	RBE DRS-070-E-W	70	75	180	153	265	247
RBE DRS-100-E-S	100	110	246	218	300	RBE DRS-100-E-W	100	110	246	218	300	289
RBE DRS-150-E-S	150	160	310	283	355	RBE DRS-150-E-W	150	160	310	283	365	349

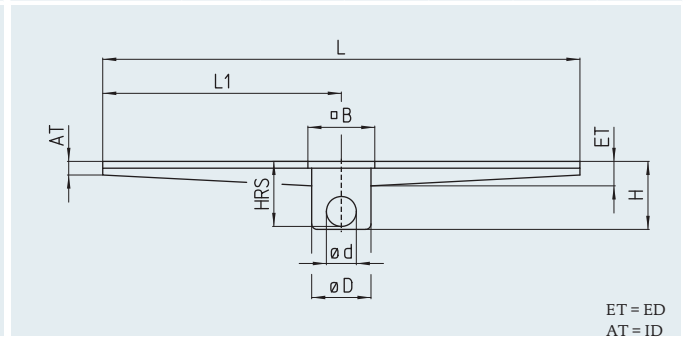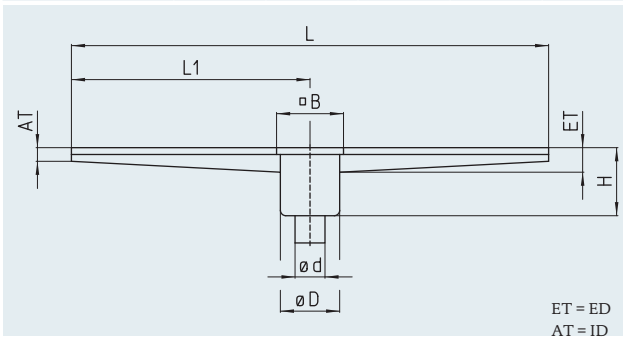

Channel drain ⁶⁾ – vertical – two-part						Channel drain ⁶⁾ – horizontal – two-part						
Model	DN	Ø d [mm]	∅ B [mm]	Ø D [mm]	H [mm]	Model	DN	Ø d [mm]	∅ B [mm]	Ø D [mm]	H [mm]	HRS [mm]
RBE H-070-E-S	70	75	180	153	129	RBE H-070-E-W	70	75	180	153	160	142
RBE H-100-E-S	100	110	246	218	178	RBE H-100-E-W	100	110	246	218	178	167
RBE H-150-E-S	150	160	310	283	209	RBE H-150-E-W	150	160	310	283	233	217

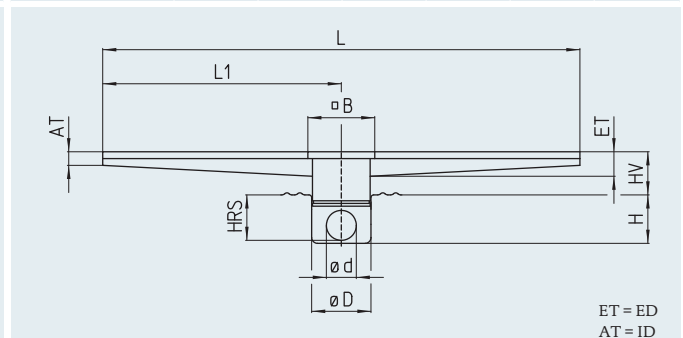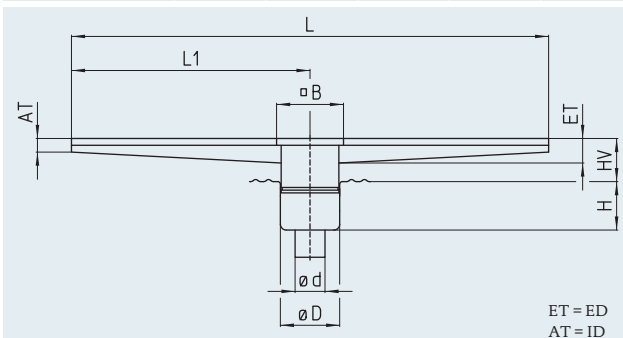

Description for use in tenders

Slot channel, Model SRD, inlet slot width 20 mm with spacers. Internally mounted edge protection reinforced with rectangular stainless steel profile. Channel with wall anchors every 500 mm all round and L-shaped assembly supports for force-fit floor connection and adjustable height dowel installation feet every 1,000 mm. Inner cross fall and fall 0.6 %. Channel available welded, not flanged, with welded channel drain. Surface grain blasted.

Channel length:	L = mm	
Grade:	• 1.4301 [AISI 304]	• 1.4571 [AISI 316 Ti] ⁸⁾
Width (P):	• 70	• 90

Optional	Inlet rim:	• Bonding flange, perforated • Bonding flange
	Assembly foot:	Assembly feet for positioning on sealing sheet

Channel drain (for details please refer the floor drain catalog)			
Model:	• RBE DRS ...	• RBE H ...	
Nominal width:	• DN 70	• DN 100	• DN 150
Outlet:	• vertical	• horizontal	

We will be pleased to provide a description for specific objects for use in tenders.

⁶⁾ further nominal widths on request ⁸⁾ all parts in contact with media in 1.4571 (AISI 316 Ti) ⁹⁾ valid when ≤ ED 100 mm; when ED > 100 mm H and HRS increase correspondingly
¹¹⁾ Wall anchors not needed