


## Channel drain RSKE-END-W

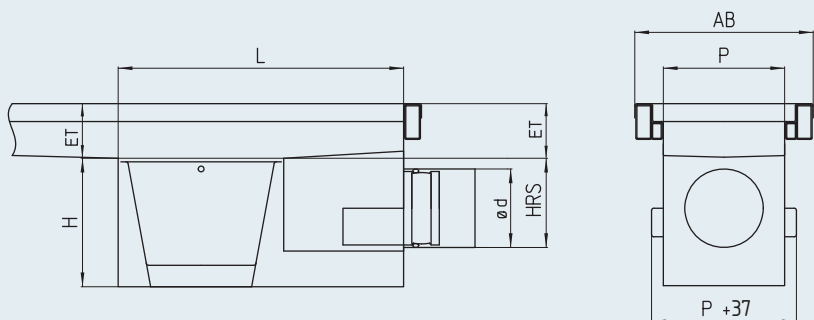

ET = ED  
AT = ID

### Channel drain – end – horizontal

Model	Nominal size DN	Ø d [mm]	Profil P [mm]	AB [mm]	L [mm]	H [mm]	HRS [mm]	Flow rate [l/s]	Silt box vol. [l]
RSKE-090-070-END-W <sup>16)</sup>	70	75	90	170	400	180	108	> 1.5	1.8
RSKE-120-070-END-W <sup>16)</sup>	70	75	120	200	400	180	108	> 1.5	2.3
RSKE-120-100-END-W <sup>16)</sup>	100	110	120	200	400	180	108	> 2.8	2.3
RSKE-170-070-END-W	70	75	170	250	400	180	108	> 1.5	4.1
RSKE-170-100-END-W	100	110	170	250	400	180	125	> 2.8	4.1
RSKE-170-150-END-W	150	160	170	250	550	250	160	> 8.2	5.5
RSKE-220-100-END-W	100	110	220	300	400	180	125	> 2.8	5.0
RSKE-220-150-END-W	150	160	220	300	550	210	150	> 8.2	7.4
RSKE-220-200-END-W	200	200	220	300	600	320	220	> 12.5	8.7
RSKE-320-150-END-W	150	160	320	400	550	210	150	> 8.2	11.4
RSKE-320-200-END-W	200	200	320	400	600	300	210	> 12.5	15
RSKE-320-250-END-W	250	250	320	400	650	350	265	> 20.2	15
RSKE-420-200-END-W	200	200	420	500	on request				
RSKE-420-250-END-W	250	250	420	500	on request				
RSKE-420-300-END-W	300	315	420	500	on request				

### Description for use in tenders

Channel drain, single-part, Model RSKE, according to EN 1253, centrally welded in the channel. With plug-in air trap and two large stainless steel silt boxes. Edge protection reinforced with an internally mounted, welded rectangular profile and channel edge. Floor connection as channel. Horizontal runoff support. Surface grain blasted.

Nominal width:	• DN 70	• DN 100	• DN 150	• DN 200	• DN 250	• DN 300
Grade:	• 1.4301 [AISI 304]		• 1.4571 [AISI 316 Ti] <sup>8)</sup>			
Cover:	• Plate cover, M125 • Grating MW25 Support rod 25/2RH		• Bar grate, M125 • Grating MW25 Support rod 25/3RH		• Plate cover, 5 mm • Grating MW25 Support rod 25/4RH	

We will be pleased to provide a description for specific objects for use in tenders.

<sup>8)</sup> all parts in contact with media in 1.4571 (AISI 316 Ti)