



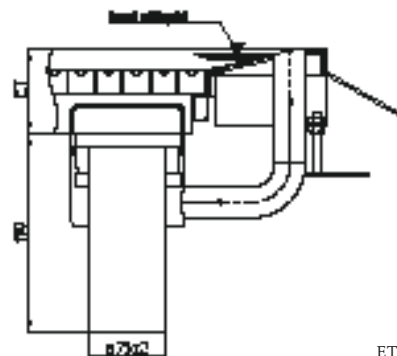


Hygiene walkthrough basin DDSB

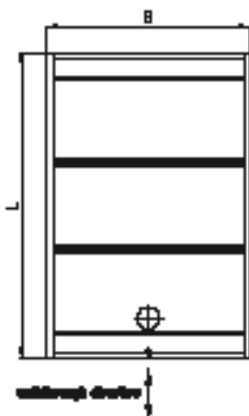

ET = ED
AT = ID
B = W

Cover variants²⁾

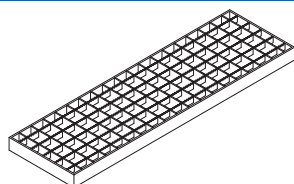

■ Grating cover

Floor connection (optional)



HFLALO Bonding flange, perforated¹⁾

HF Bonding flange¹⁾

FAWI Tile connection angle

Grade

- 1.4301 (AISI 304)
- 1.4571 (AISI 316 Ti) / 1.4404 (AISI 316)¹⁾

Description for use in tenders

Hygiene walkthrough basin, with suitable entry and exit surfaces in walkthrough direction, with continuous grate, additional traverses for reinforcement in transverse direction. The edge of the bath is reinforced by a continuous profile on the inside. Adjustable height installation feet and wall anchors all round. Grating cover, anti-slip, 15 mm fluid covering. With vertical runoff support DN 70 and suitable stopper which can be removed for emptying residue. A separate overflow is welded. Grade 1.4571 (AISI 316 Ti), Surface grain blasted.

Dimension:	L = mm	W = mm	
Grade:	• 1.4301 [AISI 304]	• 1.4571 [AISI 316 Ti] ⁸⁾	
Cover:	• Grating MW25 Support rod 25/2RH	• Grating MW25 Support rod 25/3RH	• Grating MW25 Support rod 25/4RH
Opt. Inlet rim:	• Bonding flange, perforated • Bonding flange	• Tile connection angle 30 x 30, perforated • Tile connection angle 30 x 30, unperforated	

We will be pleased to provide a description for specific objects for use in tenders.

¹⁾ If grade 1.4571 is used (AISI 316Ti) some components may be made of grade 1.4404 (AISI 316) for construction reasons ²⁾ For other covers and explanations see the page on cover variants ⁸⁾ all parts in contact with media in 1.4571 (AISI 316 Ti) ¹⁾ Wall anchors not needed