


Hinged smoke protection doors RSN1

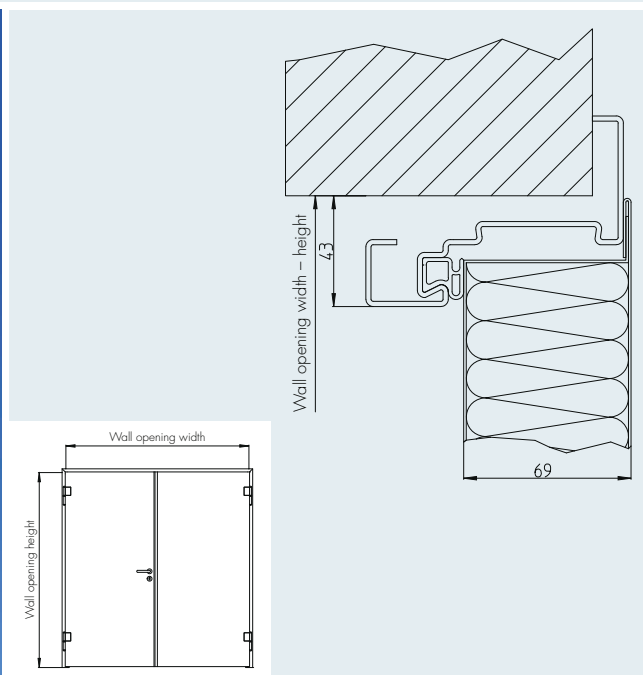

Wall opening (width x height)

Standard dimensions

_____ x _____ mm from: 500 x 500 mm to: 2750 x 2750 mm Other dimensions available on request.

Surface


- Polished, grain size 240
 - Stripe finish
 - Circular brush finish
- Other finishes available on request.

Opening direction



Frames

- Corner frame (EZD) ³⁾
- Block frame (BZD) ³⁾
- Corner frame with counter frame (EZDGGZ) ³⁾

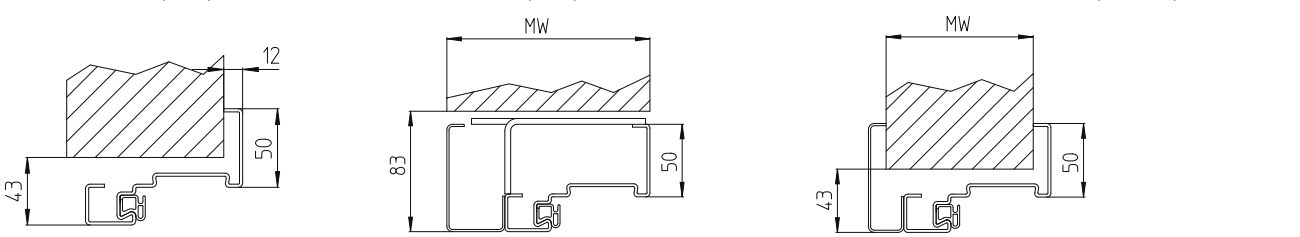

Description for use in tenders

Hinged smoke protection door, model RSN1 / RSN2, System Schröders; smoke-proof according to DIN 18095; general certificate for use in construction projects no. P-BWU03-1 17.67.15 MPA Stuttgart; with compliance mark; corner frame made in sheet steel, thickness 2.0 mm; with seal on 3 sides; door leaf 69 mm thick, thin folded on 3 sides, fully sealed, double-wall construction in machine-straightened sheet steel, thickness 1.0 mm; with internal stainless steel stiffening profiles; with door-closing mechanism; rigid fibreboard insulation; DIN 18250 class 4 lock with flush stainless steel face plate, profile cylinder hole; DIN 18273 stainless steel handle set; 2 stainless steel construction hinges (200 mm) with axial ball bearings per leaf, for minimum friction.

Material

- 1.4301 (AISI 304)
- 1.4571 (AISI 316 Ti) ¹⁾