




## Profile window (cold) FEK1

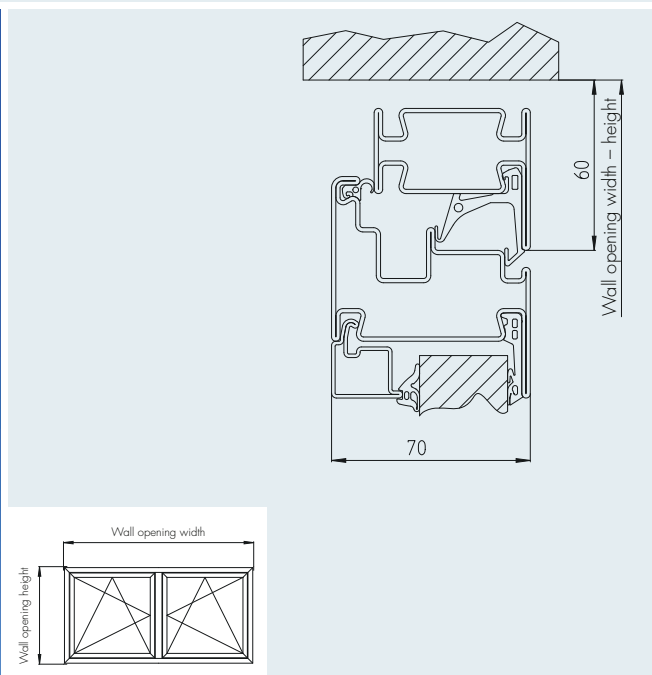

### Wall opening (width x height)

### Standard dimensions

\_\_\_\_\_ x \_\_\_\_\_ mm

from: 500 x 500 mm  
to: 1350 x 1350 mm



Other dimensions available on request.

### Surface

- Ground
- Stainless steel bead blasted


Other finishes available on request.

### Opening direction




### Frame designs


- Block frame (BRD 50) <sup>3)</sup>



- Block frame (BRD 80) <sup>3)</sup>



- T-profile frame (RT) <sup>3)</sup>



### Description for use in tenders

Non-insulated profile window, model FEK; profile depth 55 mm, fully sealed, made in extruded hollow profiles, 1.5 mm thick; frame facing and transom with grooves for seals and glazing bars; with double sealing level; welded glazing bar connections, frame and leaf corners; laminated safety glass panes/double-wall panels; door design according to specifications; corrosion protected hinges (swing, tilt, swing/tilt mechanism); stainless steel handle set.

### Material

- 1.4301 (AISI 304)

- 1.4401 (AISI 316 Ti) <sup>1)</sup>

<sup>1)</sup> hinges 1.4301 <sup>2)</sup> not suitable for outside doors <sup>3)</sup> Installation in masonry and concrete walls <sup>4)</sup> PU element installation