


Hygiene floor drain - two-part 88N-W-HV - horizontal

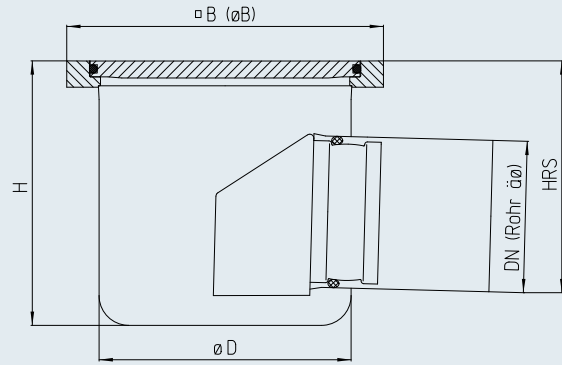

B = W
HV = HA


Model	DN	$\varnothing d$ [mm]	$\varnothing W$ [mm]	$\varnothing W$ [mm]	$\varnothing D$ [mm]	H [mm]	HV [mm]	HRS [mm]	Silt box volume [l]	Flow rate [l/s]
88N-070-E-W-HV	70	75	230	-	190	160	60-80	141	-	> 1.5
88N-070-RD-W-HV	70	75	-	235	190	160	60-80	141	-	> 1.5
88N-100-E-W-HV	100	110	230	-	190	189	60-80	164	-	> 2.8
88N-100-RD-W-HV	100	110	-	235	190	189	60-80	164	-	> 2.8

Cover variants²⁾

■ Plate cover with sealing ring, M125



■ Plate cover with holes, M125




Inlet rim

■ square ■ round


Grade

■ 1.4301 (AISI 304) ■ 1.4571 (AISI 316 Ti)¹⁾


Flange variants (optional)⁴⁾




HF
Bonding flange
HFLALO
Bonding flange, perforated



KMF
Clamping flange



FDIN
Clamping flange according to DIN 18534-2



AR¹⁴⁾
Attachment edge

Supplementary equipment (optional)

Description for use in tenders

Adjustable height hygiene floor drain, two-part, Model 88N, according to EN 1253. Upper-part can be infinitely height adjusted and twisted, without sealing ring. Inlet rim made of stable, solid material. Plate cover with O-ring gasket, smallest possible clearance between cover plate and inlet rim. Water (Class Wt) and smell-tight (Class Ot) [test pressure = 5 mbar] according to EN 1253-4. To achieve a high self-cleansing effect, the bottom of the housing has large and deep-drawn inside radius. Without air trap and silt box. Horizontal drain neck. Surface grain blasted/pickled.

Nominal width:	• DN 70	• DN 100	
Grade:	• 1.4301 [AISI 304]	• 1.4571 [AISI 316 Ti] ¹⁾	
Inlet rim:	• square	• round	
Height adjustment:	• 60 – 80 mm	• 80 – 100 mm	• mm
Cover:	• Plate cover with holes, M125		
Flange variants:	• Bonding flange • Bonding flange, perforated	• Clamping flange, t = 1.5 mm • Clamping flange according to DIN 18534-2, t = 6 mm	• Attachment edge
Air trap:	• Plug-in air trap		
Silt box:	• Silt box		
Sealing ring:	• With sealing ring (i.e. without secondary drainage)		

Optional

We will be pleased to provide a description for specific objects for use in tenders.

¹⁾If grade 1.4571 is used (AISI 316Ti) some components may be made of grade 1.4404 (AISI 316) for construction reasons ²⁾for other covers and explanations see the page on cover variants ⁴⁾For explanations see page on flange variants ¹⁴⁾H dimension change