
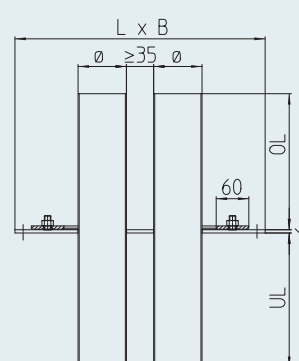


## Pipe leadthrough RDFN

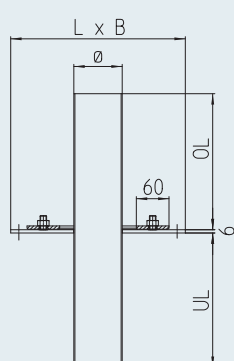

### Description for use in tenders

Pipe leadthrough, Model RDFD, with 6 mm thickness fixed and moveable flange according to DIN 18195-9. Ascender and descender of the sleeve tubes each 250 mm long. fixed flange with 4 mounting holes. Surface pickled.

Grade:	• 1.4301 (AISI 304)	• 1.4571 (AISI 316Ti) <sup>1)</sup>		
Flange plate:	• ..... x ..... mm			
Nos sleeve tubes:	• ..... Stck			
Ø Sleeve tubes:	• 21.3 x 2.0 mm	• 26.9 x 2.0 mm	• 33.7 x 2.0 mm	• 40.0 x 2.0 mm
	• 42.4 x 2.0 mm	• 48.3 x 2.0 mm	• 54.0 x 2.0 mm	• 60.3 x 2.0 mm
	• 70.0 x 2.0 mm	• 76.1 x 2.0 mm	• 88.9 x 2.0 mm	• 108.0 x 2.0 mm
	• 114.3 x 2.0 mm	• 129.0 x 2.0 mm	• 139.7 x 2.0 mm	• 154.0 x 2.0 mm
	• 168.3 x 2.0 mm	• 204.0 x 2.0 mm	• 219.1 x 2.0 mm	• other $\varnothing$ on request

Optional

Ascender OL:	• ..... mm
Descender UL:	• ..... mm
Other optional equipment:	• Bonded flange with wall edging

We will be pleased to provide a description for specific objects for use in tenders.

<sup>1)</sup> If grade 1.4571 (AISI 316Ti) is used, some components may be made of grade 1.4404 (AISI 316) for construction reasons.