



Impact plates

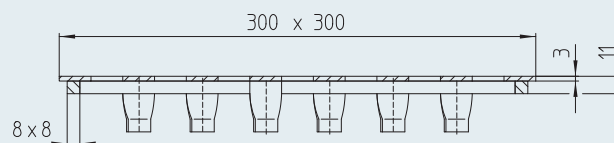

Description for use in tenders for impact plate 300 x 300

Impact plate as ground plate, consisting of one 3 mm thick perforated ground plate with 91 long perforations 20 x 6 mm, with 8 x 8 mm square material as foundation, 10 wall anchors arranged in several rows. Surface grain blasted.

Grade: • 1.4301 (AISI 304) • 1.4571 (AISI 316 Ti)¹⁾



Description for use in tenders for impact plate 500 x 100

Impact plate as ground plate, consisting of one 3 mm thick perforated ground plate with 48 long perforations 20 x 6 mm, with 8 x 8 mm square material as foundation, 3 wall anchors arranged in several rows. Surface grain blasted.

Grade: • 1.4301 (AISI 304) • 1.4571 (AISI 316 Ti)¹⁾

¹⁾ If grade 1.4571 (AISI 316Ti) is used, some components may be made of grade 1.4404 (AISI 316) for construction reasons.