



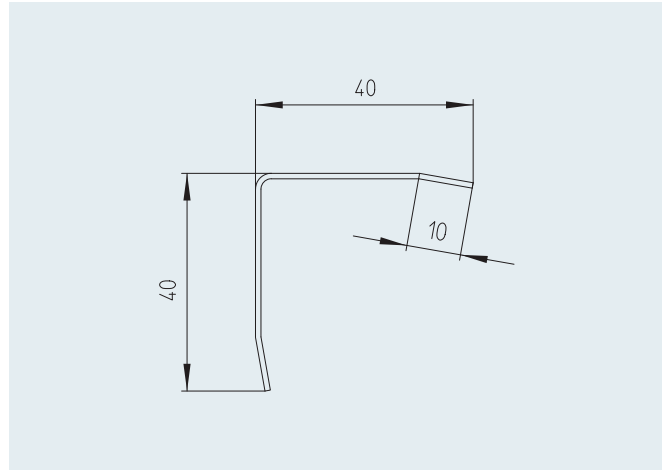

## Corner protection strips

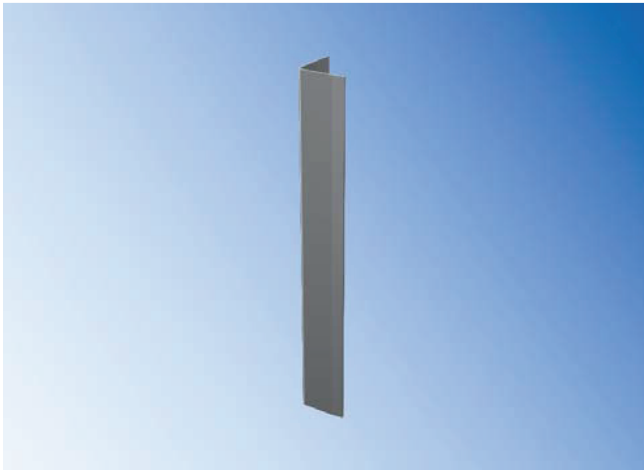


### Description for use in tenders KS-01A

Corner protection strip Model KS-01A for outside corners for subsequent adhesion. Square design, side lengths 40 x 40 mm – side ends slightly scored, thickness of material 1.0 mm. Ground surface.

Grade:	• 1.4301 (AISI 304)	• 1.4571 (AISI 316 Ti) <sup>1)</sup>			
Length:	• 1,500 mm	• 2,000 mm	• 2,500 mm	• 3,000 mm	• ..... mm
Side lengths:	• 30 x 30 mm	• 50 x 50 mm	• ..... mm		
Thickness of material:	• 1.5 mm				

Opt.

We will be pleased to provide a description for specific objects for use in tenders.

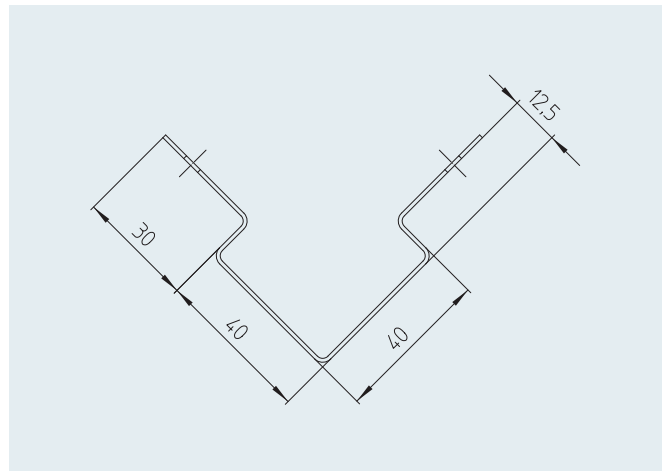

### Description for use in tenders KS-02EA

Corner protection strip Model KS-02EA for outside corners for tiling, 12.5 mm spread. Square design, side lengths 40 x 40 mm – side ends with perforation for dowel attachment or plastering, thickness of material 1.0 mm. Ground surface.



Grade:	• 1.4301 (AISI 304)	• 1.4571 (AISI 316 Ti) <sup>1)</sup>			
Length:	• 1,500 mm	• 2,000 mm	• 2,500 mm	• 3,000 mm	• ..... mm
Side lengths:	• 30 x 30 mm	• 50 x 50 mm	• ..... mm		
Attachment method:	• with holes for subsequent screwing				
Thickness of material:	• 1.5 mm				

Optional

We will be pleased to provide a description for specific objects for use in tenders.

<sup>1)</sup> If grade 1.4571 (AISI 316Ti) is used, some components may be made of grade 1.4404 (AISI 316) for construction reasons.

## Corner protection strips

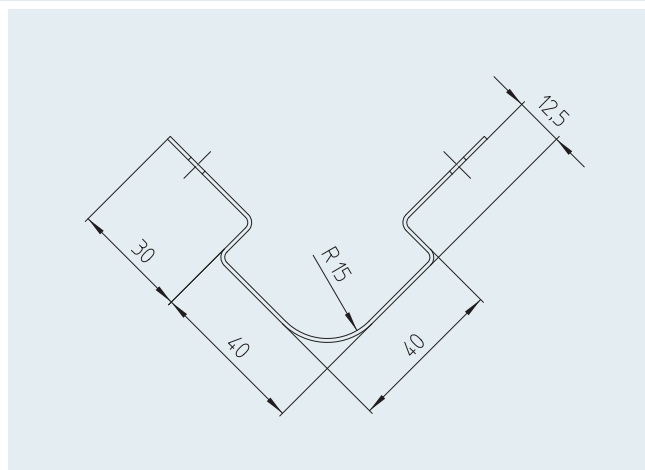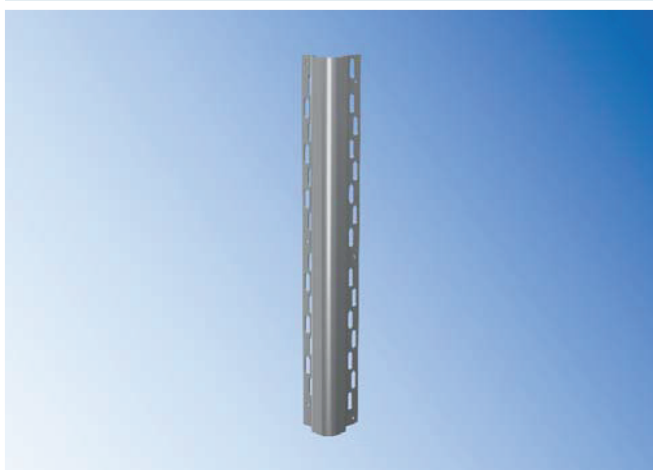


### Description for use in tenders KS-03RA

Corner protection strip Model KS-03RA for outside corners for tiling, 12.5 mm spread. Round design (15 mm radius), Side lengths 40 x 40 mm – side ends with perforation for dowel attachment or plastering, thickness of material 1.0 mm. Ground surface.

Optional	Grade:	• 1.4301 (AISI 304)	• 1.4571 (AISI 316 Ti) <sup>1)</sup>			
	Length:	• 1,500 mm	• 2,000 mm	• 2,500 mm	• 3,000 mm	• ..... mm
	Side lengths:	• 30 x 30 mm	• 50 x 50 mm	• ..... mm		
	Material thickness:	• 1.5 mm				

We will be pleased to provide a description for specific objects for use in tenders.

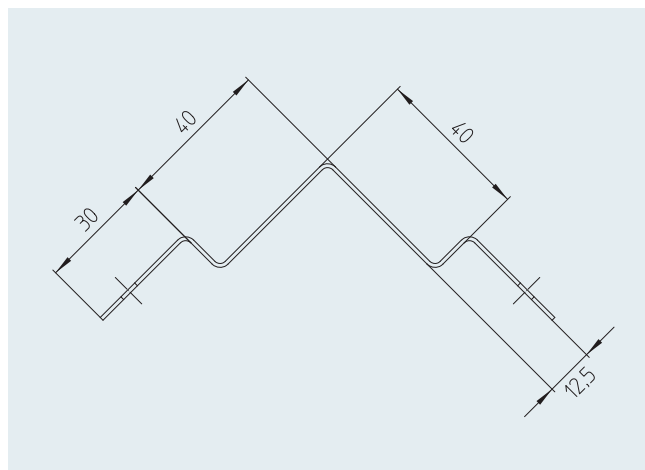

### Description for use in tenders KS-02EI

Corner protection strip Model KS-02EI for inside corners for tiling, 12.5 mm spread. Side lengths 40 x 40 mm, side ends with perforation for dowel attachment or plastering, thickness of material 1.0 mm. Ground surface.

Optional	Grade:	• 1.4301 (AISI 304)	• 1.4571 (AISI 316 Ti) <sup>1)</sup>			
	Length:	• 1,500 mm	• 2,000 mm	• 2,500 mm	• 3,000 mm	• ..... mm
	Side lengths:	• 30 x 30 mm	• 50 x 50 mm	• ..... mm		
	Thickness of material:	• 1.5 mm				

We will be pleased to provide a description for specific objects for use in tenders.